


Date: 24.04.2026

Installation trunking FB 100x230-7030, PVC, with base perforation, grey

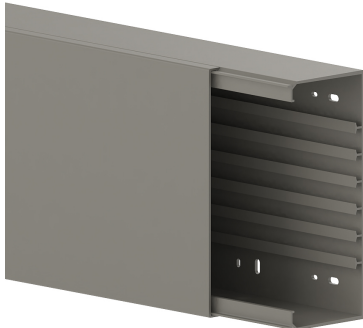

Product description

PVC installation trunking according to DIN EN 50085-2-1 for cable routing on walls and ceilings, consisting of completely overlapping cover and base with double-row base perforation for fastening and three DIN rails for the installation of device installation boxes as well as snap-in partition walls, 4 freely movable cable clips are included per 2 metre. **Note:** Sound and fire protection measures must be carried out professionally.

Basic data

| | |
|---------------|------------------|
| Item number | 1091 |
| Product group | 10-Cable routing |
| Packing unit | 4 meters |
| EAN code | 4018475010918 |
| Tariff number | 39259020 |

Technical features

| | |
|--------------------------------|--------------------------|
| Height | 100 mm |
| Width | 230 mm |
| Length | 2000 mm |
| Useful cross section | 22938 mm ² |
| Material | plastic |
| Material quality | Polyvinyl chloride (PVC) |
| Halogen free | no |
| Anti-bacterial treatment | no |
| Surface protection | untreated |
| Suitable for circuit integrity | no |
| Colour | grey |
| Transparent | no |
| RAL-number | 7030 |
| Number of permanent partitions | 0 |
| Number of plug-in partitions | 3 |
| Type of fastening | Bottom perforation |
| Cover model | loose |
| With cable fixing clip | yes |
| With protective foil | no |
| With duct connector | no |
| Delivery on roll | no |
| Pre-stamping | no |
| Degree of protection (IP) | IP30 |
| Impact strength | IK08 |
| Operating temperature | from -5 to 60 °C |