


Date: 24.04.2026

## Installation trunking FB 100x230-9010, PVC, with base perforation, pure white

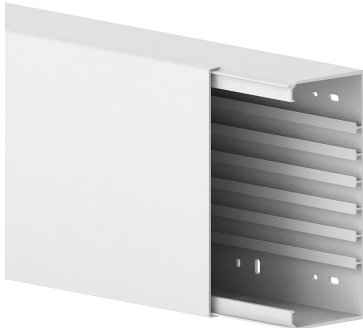

### Product description

PVC installation trunking according to DIN EN 50085-2-1 for cable routing on walls and ceilings, consisting of completely overlapping cover and base with double-row base perforation for fastening and three DIN rails for the installation of device installation boxes as well as snap-in partition walls, 4 freely movable cable clips are included per 2 metre. **Note:** Sound and fire protection measures must be carried out professionally.

### Basic data

Item number	11093
Product group	10-Cable routing
Packing unit	4 meters
EAN code	4018475253438
Tariff number	39259020

### Technical features

Height	100 mm
Width	230 mm
Length	2000 mm
Useful cross section	22938 mm <sup>2</sup>
Material	plastic
Material quality	Polyvinyl chloride (PVC)
Halogen free	no
Anti-bacterial treatment	no
Surface protection	untreated
Suitable for circuit integrity	no
Colour	white
Transparent	no
RAL-number	9010
Number of permanent partitions	0
Number of plug-in partitions	3
Type of fastening	Bottom perforation
Cover model	loose
With cable fixing clip	yes
With protective foil	no
With duct connector	no
Delivery on roll	no
Pre-stamping	no
Degree of protection (IP)	IP30
Impact strength	IK08
Operating temperature	from -5 to 60 °C