


Date: 24.04.2026

## Installation trunking LFG 15x30-9010, PVC, with base perforation, pure white (Set: 4x1m)

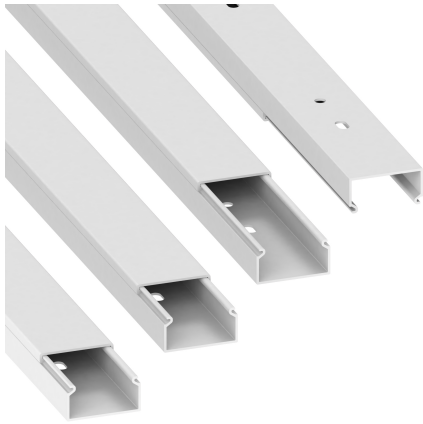

### Product description

PVC installation trunking according to DIN EN 50085-2-1 for cable laying on walls and ceilings, consisting of a completely overlapping cover and base with single-row base perforation for fastening.

**Note:** Sound and fire protection measures must be carried out professionally.

### Basic data

|               |                  |
|---------------|------------------|
| Item number   | ws10257          |
| Product group | 10-Cable routing |
| Packing unit  | 18 pieces        |
| EAN code      | 4018475349209    |
| Tariff number | 39259020         |

### Technical features

|                                |                          |
|--------------------------------|--------------------------|
| Height                         | 16 mm                    |
| Width                          | 30 mm                    |
| Length                         | 1000 mm                  |
| Useful cross section           | 340 mm <sup>2</sup>      |
| Material                       | plastic                  |
| Material quality               | Polyvinyl chloride (PVC) |
| Halogen free                   | no                       |
| Anti-bacterial treatment       | no                       |
| Surface protection             | other                    |
| Suitable for circuit integrity | no                       |
| Colour                         | white                    |
| Transparent                    | no                       |
| RAL-number                     | 9010                     |
| Number of permanent partitions | 0                        |
| Number of plug-in partitions   | 0                        |
| Type of fastening              | Bottom perforation       |
| Cover model                    | loose                    |
| With cable fixing clip         | no                       |
| With protective foil           | no                       |
| With duct connector            | no                       |
| Delivery on roll               | no                       |
| Pre-stamping                   | no                       |
| Degree of protection (IP)      | IP30                     |
| Impact strength                | IK08                     |
| Operating temperature          | from -5 to 60 °C         |