


Date: 24.04.2026

## Installation trunking LFG 20x20-9001, PVC, with base perforation, cream white

### Product description

PVC installation trunking according to DIN EN 50085-2-1 for cable laying on walls and ceilings, consisting of a completely overlapping cover and base with single-row base perforation for fastening.

**Note:** Sound and fire protection measures must be carried out professionally.

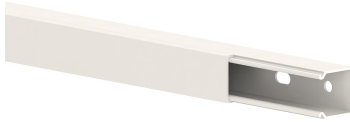

### Basic data

Item number	1013
Product group	10-Cable routing
Packing unit	128 meters
EAN code	4018475010130
Tariff number	39259020

### Technical features

Height	18.5 mm
Width	18.5 mm
Length	2000 mm
Useful cross section	265 mm <sup>2</sup>
Material	plastic
Material quality	Polyvinyl chloride (PVC)
Halogen free	no
Anti-bacterial treatment	no
Surface protection	other
Suitable for circuit integrity	no
Colour	white
Transparent	no
RAL-number	9001
Number of permanent partitions	0
Number of plug-in partitions	0
Type of fastening	Bottom perforation
Cover model	loose
With cable fixing clip	no
With protective foil	no
With duct connector	no
Delivery on roll	no
Pre-stamping	no
Degree of protection (IP)	IP30
Impact strength	IK07
Operating temperature	from -5 to 60 °C