Date: 04.09.2026

# Installation trunking LFG 40x60-9005, PVC, with base perforation, black (Set: 2x1 m)

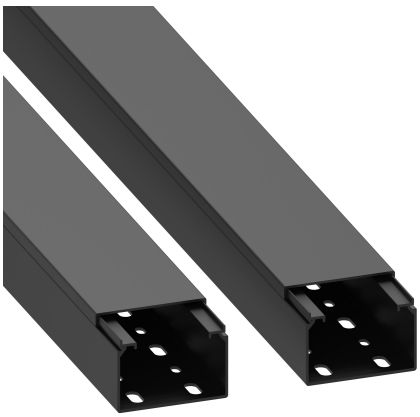

## Product description

PVC installation trunking according to DIN EN 50085-2-1 for cable routing on walls and ceilings, consisting of completely overlapping cover and base with double-row base perforation for fastening, 4 freely adjustable cable retaining clips are included per 2 metre. **Note:** Sound and fire protection measures must be carried out professionally.

## Basic data

| | |
|---|---|
| Item number | ws10262 |
| Product group | 10-Cable routing |
| Packing unit | 6 pieces |
| EAN code | 4018475349254 |
| Tariff number | 39259020 |

## Technical features

| | |
|---|---|
| Height | 40 mm |
| Width | 57 mm |
| Length | 1000 mm |
| Useful cross section | 1854 mm² |
| Material | plastic |
| Halogen free | no |
| Anti-bacterial treatment | no |
| Surface protection | other |
| Suitable for circuit integrity | no |
| Colour | black |
| Transparent | no |
| RAL-number | 9005 |
| Number of permanent partitions | 0 |
| Number of plug-in partitions | 0 |
| Type of fastening | Bottom perforation |
| Cover model | loose |
| With cable fixing clip | yes |
| With protective foil | no |
| With duct connector | no |
| Delivery on roll | no |
| Pre-stamping | no |
| Degree of protection (IP) | IP30 |
| Impact strength | IK10 |
| Operating temperature | from -5 to 60 °C |