


Date: 24.04.2026

On-floor trunking ABK 18x75-8014, PVC, 3 chambers, ribbed back side, brown (length 1 m)

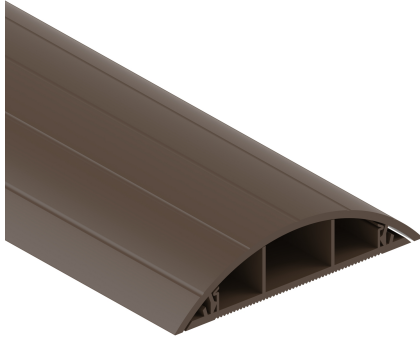

Product description

On-floor installation duct made of PVC according to DIN EN 50085-2-2 for the protection of cables and to avoid tripping hazards caused by cables lying on the floor, consisting of a base with three separate chambers and an overlapping cover with a fluted surface structure that is less sensitive to scratches. The profile can be walked on as well as stepped on and can withstand vertical loads of ~ 102 kg (1000 N). **Note:** The colour of the bases may vary due to production.

Basic data

Item number	ws10265
Product group	70-Residential installation
Packing unit	22 pieces
EAN code	4018475349285
Tariff number	39259020

Technical features

Width	75 mm
Height	18 mm
Number of channels	3
Length	1000 mm
Material	plastic
Halogen free	no
Anti-bacterial treatment	no
Colour	brown
RAL-number	8014
Self-adhesive	yes
Sealing lip	no
With anti-slip layer	no
Max. load capacity	0.102 t
Degree of protection (IP)	IP30
Impact strength	IK08
With cover cap	no
Material quality	Polyvinyl chloride (PVC)
Permitted cable diameter	from 8 to 10 mm
Mounting perforation in bottom	no
Slotted hole	no
With fixation	no
Demountable	yes
Reflective	no
Fuel- and oil resistant	yes
Resistance to vertical load applied in a small surface according IEC 61084-2-2	1000
Resistance to vertical load applied in a large surface according IEC 61084-2-2	1000

Suitable for car	no
Suitable for truck	no
Bending strength	Rigid