
Date: 06.11.2026

# Skirting trunking 4D 20x80-9010, 3 chambers, perforated base, white (pack: 4 x 1.5 m)

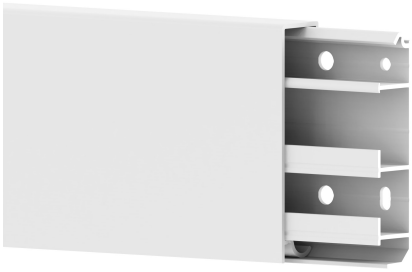

## Product description

E skirting trunking made of PVC according to DIN EN 50085-2-1 for cable laying on the wall, consisting of a base with grooved back for fixing with mounting adhesive and three separate chambers for cable laying/separation as well as a completely overlapping cover for snapping onto the base. The distance from the floor to the first occupancy chamber is 11 mm and thus fulfils the minimum distance to the floor according to DIN EN 50085-2-1.

## Basic data

| | |
|---|---|
| Item number | ws10268 |
| Product group | 75-4D |
| Packing unit | 4 pieces |
| EAN code | 4018475349315 |
| Tariff number | 39259020 |

## Technical features

| | |
|---|---|
| Height | 80 mm |
| Depth | 20 mm |
| Length | 1500 mm |
| With carpet border | no |
| Material | plastic |
| Halogen free | no |
| Colour cover | white |
| RAL-number | 9010 |
| Decoration | without |
| Number of partitions | 2 |
| Sealing lip cover | without |
| With protective foil | no |
| Degree of protection (IP) | IP40 |
| Useful cross section | 970 mm² |
| Impact strength | IK08 |
| Type of fastening | Bottom perforation |