
Date: 07.11.2026

# Wall trunking-base BRS 80x200-9010, steel, 80 mm cover, pure white

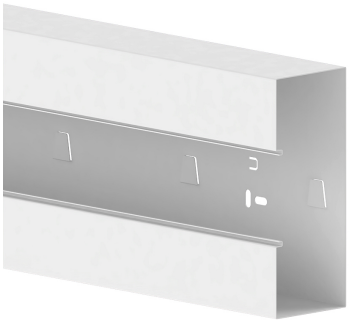

## Product description

Base of wall duct made of sheet steel to DIN EN 50085-2-1 for cable routing directly on the wall or on wall brackets, for an 80 mm cover for device installation of commercially available switch ranges in combination with front-locking accessory mounting boxes or M45 built-in devices with the aid of front-locking adapter frames, base part with four-row floor perforation for fastening, a retaining lug for hanging a partition wall for separating cables and earthing lugs for additional equipotential bonding by means of earthing cable. **Note:** Potential equalisation, earthing, sound and fire protection measures must be carried out professionally. Bottom and cover with self-grounding contact surfaces.

## Basic data

| | |
|---|---|
| Item number | 11659 |
| Product group | 20-Wall installation |
| Packing unit | 4 meters |
| EAN code | 4018475272224 |
| Tariff number | 73089059 |

## Technical features

| | |
|---|---|
| Width | 200 mm |
| Depth | 80 mm |
| Length | 2000 mm |
| Number of covers | 1 |
| Covers supplied with the product | no |
| Cover width 1 | 80 mm |
| Symmetric | yes |
| Construction type rectangular | yes |
| Material | Steel |
| Halogen free | yes |
| Anti-bacterial treatment | no |
| Surface protection | continuously galvanised and coated |
| Colour | white |
| RAL-number | 9010 |
| Construction rear wall (inner side) | With cam clamps |
| With protective foil | no |
| Number of plug-in partitions | 1 |
| With duct connector | no |
| Mounting perforation in bottom | yes |
| Mounting method cover | Inner lying |
| With cable fixing clip | no |
| Useful cross section | 15513 mm² |
| Degree of protection (IP) | IP30 |
| Impact strength | IK10 |
| Operating temperature | from -5 to 60 °C |